

# eldoLED®



## LED Drivers Small Form Factor


## Superior Performance. Surprisingly Small.

- **ECOdrive Series** – *Superior performance for everyday lighting, with smooth and flicker-safe dimming down to 1%.*
- **SOLOdrive Series** – *LED dimming made beautiful, enabling dim-to-warm applications and dim-to-dark, deep dimming down to 0.1%.*
- **OPTOTRONIC Indoor Series** – *Trusted value delivered, providing smooth, natural dimming down to 5% or 1% (depending on model).*

Small Form Factor (SFF) LED drivers by eldoLED® are optimally sized for luminaires with small apertures and combine the dimming performance, controls interface options, and programmable features available with ECOdrive, SOLOdrive and OPTOTRONIC indoor series.



## A Small Form Factor – Available with Bottom and Side Feeds

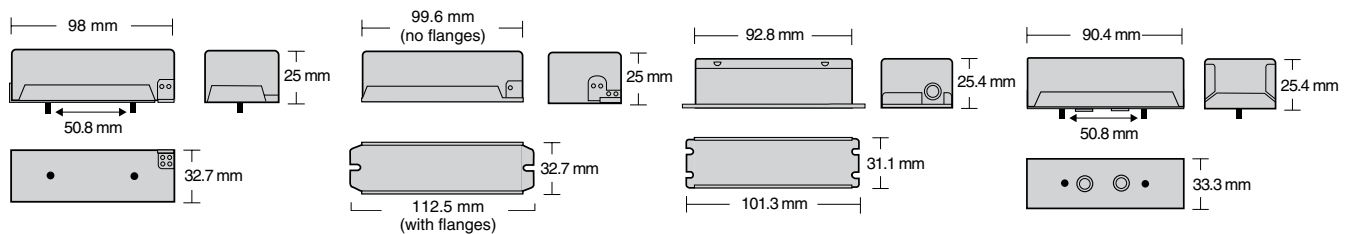

B: Bottom Feed (ECOdrive, SOLOdrive)

S: Side Feed (ECOdrive, SOLOdrive)

F: Side Feed (OPTOTRONIC)

J: Bottom Feed (OPTOTRONIC)

## Select your Small Form Factor LED Driver

Series		Form Factor	LED Code	0-10V	DALI-2	Phase-Cut	Minimum Dimming
<b>ECOdrive 22W</b>		<b>ECOdrive 12W</b>					
ECOdrive 22B-M1M0Z	ECOdrive 12B-M1M0Z	B	●				1%
ECOdrive 22B-M1Z0A	ECOdrive 12B-M1Z0A	B		●	●		1%
ECOdrive 22B-M1Z0D	ECOdrive 12B-M1Z0D	B	●				1%
ECOdrive 22S-M1M0Z	ECOdrive 12S-M1M0Z	S	●				1%
ECOdrive 22S-M1M1Z	ECOdrive 12S-M1M1Z	S (no flanges)					1%
ECOdrive 22S-M1Z0A	ECOdrive 12S-M1Z0A	S		●			1%
ECOdrive 22S-M1Z0D	ECOdrive 12S-M1Z0D	S	●		●		1%
ECOdrive 22S-M1Z1A	ECOdrive 12S-M1Z1A	S (no flanges)		●			1%
ECOdrive 22S-M1Z1D	ECOdrive 12S-M1Z1D	S (no flanges)	●		●		1%
<b>SOLOdrive 22W</b>		<b>SOLOdrive 12W</b>					
SOLOdrive 22B-M1M0Z	SOLOdrive 12B-M1M0Z	B	●				0.1%
SOLOdrive 22B-M1Z0A	SOLOdrive 12B-M1Z0A	B		●			0.1%
SOLOdrive 22B-M1Z0D	SOLOdrive 12B-M1Z0D	B	●		●		0.1%
SOLOdrive 22S-M1M0Z	SOLOdrive 12S-M1M0Z	S	●				0.1%
SOLOdrive 22S-M1M1Z	SOLOdrive 12S-M1M1Z	S (no flanges)	●				0.1%
SOLOdrive 22S-M1Z0A	SOLOdrive 12S-M1Z0A	S		●			0.1%
SOLOdrive 22S-M1Z0D	SOLOdrive 12S-M1Z0D	S	●		●		0.1%
SOLOdrive 22S-M1Z1A	SOLOdrive 12S-M1Z1A	S (no flanges)		●			0.1%
SOLOdrive 22S-M1Z1D	SOLOdrive 12S-M1Z1D	S (no flanges)	●		●		0.1%
<b>OPTOTRONIC 12W</b>							
OT 12W UNV 0A3 DUALDIM DIM-1 F-HOUSING		F		●		●	1%
OT 12W UNV 0A3 DUALDIM DIM-1 J-HOUSING		J		●		●	1%
OT 12W UNV 0A3 DUALDIM DIM-5 F-HOUSING		F		●		●	5%
OT 12W UNV 0A3 DUALDIM DIM-5 J-HOUSING		J		●		●	5%
<b>OPTOTRONIC 20W</b>							
OT 20W UNV 0A5 DUALDIM DIM-1 F-HOUSING		F		●		●	1%
OT 20W UNV 0A5 DUALDIM DIM-1 J-HOUSING		J		●		●	1%
OT 20W UNV 0A5 DUALDIM DIM-5 F-HOUSING		F		●		●	5%
OT 20W UNV 0A5 DUALDIM DIM-5 J-HOUSING		J		●		●	5%

Specifications subject to change without notice. Actual performance may differ as a result of end-user environment and application. Please note the OPTOTRONIC series is exclusively available in North America. Contact your Key Account Manager for more details.

For more information, visit [www.eldoled.com](http://www.eldoled.com)