

**SOLOdrive**

SOLOdrive offers industry-best Natural Dimming to dark - LED dimming made beautiful! With any dimmer, in any application. Symbiosis on SOLOdrive stands for unity, for the SOLOdrive working seamlessly together with LED modules, controls and intelligent luminaire elements.

**Product offering**



**SOLOdrive 1060/M-BIS**

Part number (P/N)	SL1060M1-BIS
Product description	SOLOdrive, 100W, DALI, 1 control channel, constant current, 4x 57V output, side feed, long metal

**Features & benefits**

Natural dimming	Dim to dark, smooth brightness changes, excellent flicker performance, adaptable dimming curves, configurable minimum dimming level
LEDcode	Configurable design to work with most constant current LED modules and arrays, while providing a connection point to integrated peripheral controls
Programmable	Fine-tune your driver for any application
Performance	Universal input voltage range, low inrush current and total harmonic distortion (THD), high power factor and efficiency
Camera compatibility	Hybrid HydraDrive technology is proven to work in TV studios and security camera environments

Project name:	Contact details:
Project number:	
LED driver order number:	

---

## Electrical specifications

---

Driver type	Constant current
Number of LED outputs	4
Maximum LED output power	100W
Programmable LED output current range	200 - 1050mA
LED output type	Programmable in 1mA increments within specified current range
LED output voltage range	2 - 57V
Nominal input voltage range AC	120 - 277V
Nominal input voltage range DC	120 - 275V
Control protocol	DALI version-1, Device Type 6 LEDcode
Control channels	1

---

## Certifications

---



## Warranty

---

Warranty period [General Terms and Conditions](#)

---

## Dimensions, weight, packaging

---


Length (L)	typical: 370 mm / 14.57 in
Width (W)	typical: 41 mm / 1.62 in
Height (H)	typical: 30 mm / 1.18 in
Weight	846 g

---

### Connector layout



### Order number configurator

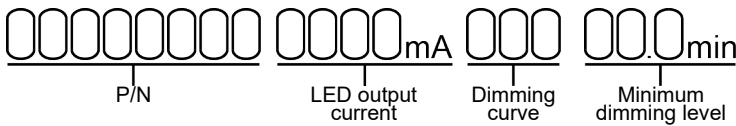

P/N	LED driver part number
LED output current	Enter value in 1mA increments, e.g. "811" for 811mA
Dimming curve	"LOG" for logarithmic (default) "LIN" for linear
Minimum dimming level	Leave blank for default minimum dimming level of 0.1%. Specify in 0.1% increments, e.g. "10.5" for 10.5%.

#### Europe, Rest of World

eldoLED B.V.  
Science Park Eindhoven 5125  
5692 ED Son  
The Netherlands

E: [info@eldoled.com](mailto:info@eldoled.com)  
W: [www.eldoled.com](http://www.eldoled.com)

#### North America

eldoLED America  
One Lithonia Way  
Conyers, GA 30012  
USA

E: [info@eldoled.com](mailto:info@eldoled.com)  
W: [www.eldoled.com](http://www.eldoled.com)