

POWERdrive

POWERdrive's dynamic response can be tuned to fit any content - from exceptionally smooth fades in architecture to fast-paced video in entertainment. This constant current LED driver is DMX/RDM compatible, and allows you to create your colour or dynamic show without an external controller. Symbiosis ensures the LED driver works seamlessly together with LED modules, controls and intelligent luminaire elements.


Product offering



POWERdrive 1061/S-BIS

Part number P/N	PW1061S1-BIS
Product description	POWERdrive, 100W, DMX/RDM, 4 control channels, constant current, 4x 57V outputs, square metal

Order number configurator

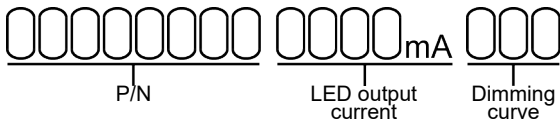

P/N	LED driver part number
LED output current	Enter value in 10mA increments, e.g. "0260", "1010", etc.
Dimming curve	"LOG" for logarithmic (default) "LIN" for linear "SQU" for square

Warranty

Warranty period [General Terms and Conditions](#)

Project name:	Contact details:
Project number:	
LED driver order number:	

Electrical specifications

Driver type	Constant current
Number of LED outputs	4
Maximum LED output power	100W
Programmable LED output current range	200 - 1050mA
LED output type	programmable in 10mA steps via DMX terminal and FluxTool
LED output voltage range	2 - 57V
Nominal input voltage range AC	120 - 277V
Nominal input voltage range DC	120 - 275V
Control protocol	DMX/RDM
Control channels	4

Dimensions, weight, packaging

Length (L)	typical: 230 mm / 9.06 in
Width (W)	typical: 80 mm / 3.15 in
Height (H)	typical: 30 mm / 1.18 in
Weight	933.5 g
Products per box	20 pcs

Certifications



Europe, Rest of World

eldoLED B.V.
Science Park Eindhoven 5125
5692 ED Son
The Netherlands

E: info@eldoled.com
W: www.eldoled.com

North America

eldoLED America
One Lithonia Way
Conyers, GA 30012
USA

E: info@eldoled.com
W: www.eldoled.com