

SOLOdrive offers industry-best Natural Dimming to 0% - LED dimming made beautiful! With any dimmer, in any application. Symbiosis ensures the LED driver works seamlessly together with LED modules, controls and intelligent luminaire elements.



SOLOdrive AC, 30W, 0-10V, constant current, 1x 55V output, side feed, metal square

### Features

- Natural dimming, continuous to dark (Hybrid HydraDrive)
- Symbiosis: add value with sensing, connecting, protecting, tooling, communicating, sharing and lighting dynamics features
- Programmable to fit application

- Low inrush and THD
- High power factor and efficiency

### Electrical specifications

Driver type	constant current
LED outputs	1 (UL Class 2)
LED output power	30W max
Programmable LED output current range	150-1,400mA
LED output current resolution	programmable in 1mA steps
LED output voltage range	2-55V
Standby power	<0.5W
Input voltage AC	120-250V (ENEC), 120-277V (UL)
Input voltage DC	120-250V
Input current	0.35A max
Inrush current	negligible: 30mA*s @ 277V
Surge protection	2kV DM, 2kV CM
Efficiency @ full load	85%
Efficiency @ 2/3 load	≥83%
Power factor @ full load	>0.9C
THD @ full load	<20%
Dimming protocol	0-10V
Control channels	1
Ta operating range	-20 °C ... +50 °C / -4 °F ... +122 °F
Tc max	80 °C / 176 °F
Tc lifetime	75 °C / 167 °F
Type TL	@1400mA: Tref 54 °C, max 81 °C
Warranty	3 years

### Certifications & standards




EN 61347-1/-2-13, EN 62384, EN 55015, EN 55022, EN 61000-3-2, EN 61547

UL 1310, UL 8750 (Class 2 output). Type TL LED driver

### Dimensions, weight, packaging

LxWxH	130x72x28mm / 5.12x2.83x1.10in
Weight	285.5 g, 10.07 oz
Drivers per carton	40 pcs

### Order number configuration

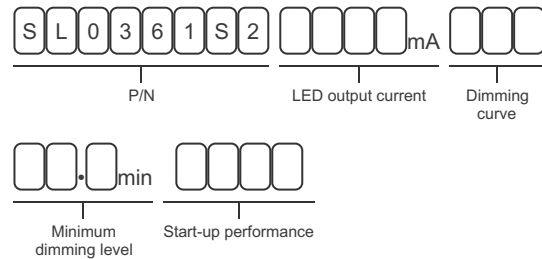

LED output current: in 1mA steps, e.g. "0258", "888", etc.

Dimming curve: enter "LOG" for a logarithmic, "LIN" for a linear, "SLN" for a soft-linear, or "SQU" for a square dimming curve.

Minimum dimming level: write to one decimal place, e.g. "05.0" for 5%, "07.5" for 7.5%, "10.1" for 10.1%, etc. Leave blank if default minimum dimming level (0.1%) is required.

Start-up performance: Enter "CA24" for improved start-up performance to comply with ENERGY STAR Luminaires v2.0 and the latest CA Title 24 standard, effective January 2017.

### Wiring

120-277 VAC —  
0-10V —



— LED output  
— LEDcode / NTC

Project name:	Contact details:
Project number:	
LED driver order number:	

### Europe, Rest of World

eldoLED B.V.  
Science Park Eindhoven 5125  
5692 ED Son  
The Netherlands  
sales@eldoled.com

### North America

eldoLED America  
One Lithonia Way  
Conyers, GA 30012  
USA  
nasales@eldoled.com